




A better way to prepare your soil

DUTZI®

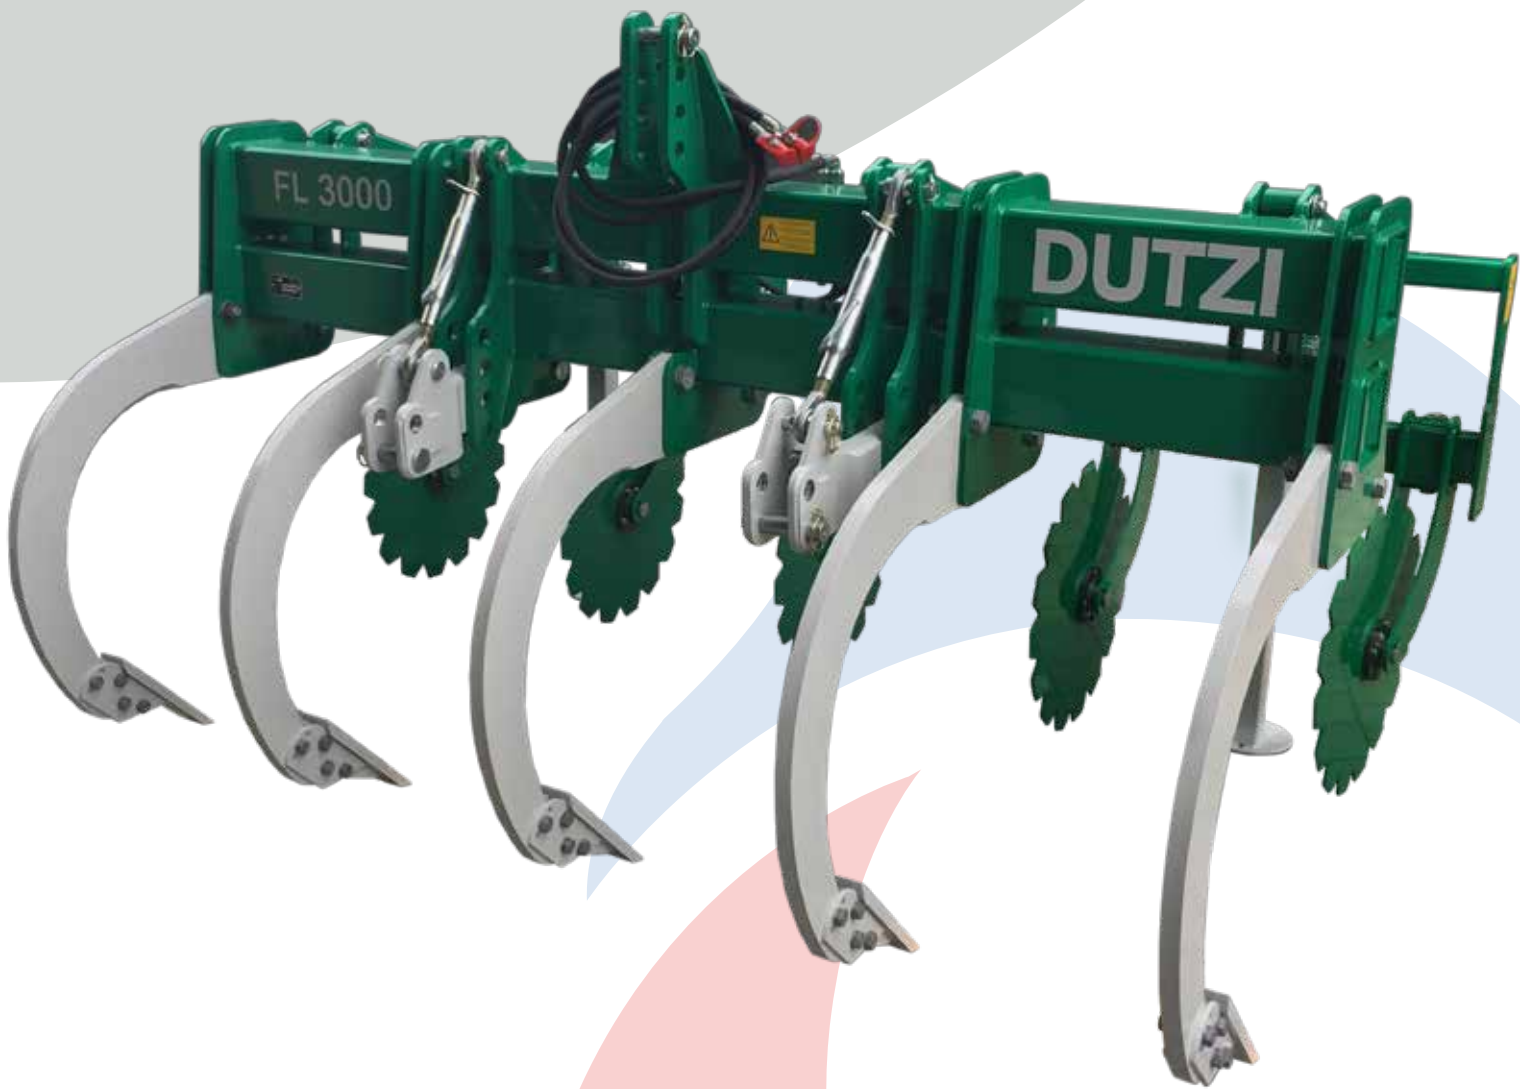

FL


2500
3000
4000



A better way to prepare your soil

DUTZI® www.dutzi.com

FL | 2500
3000
4000

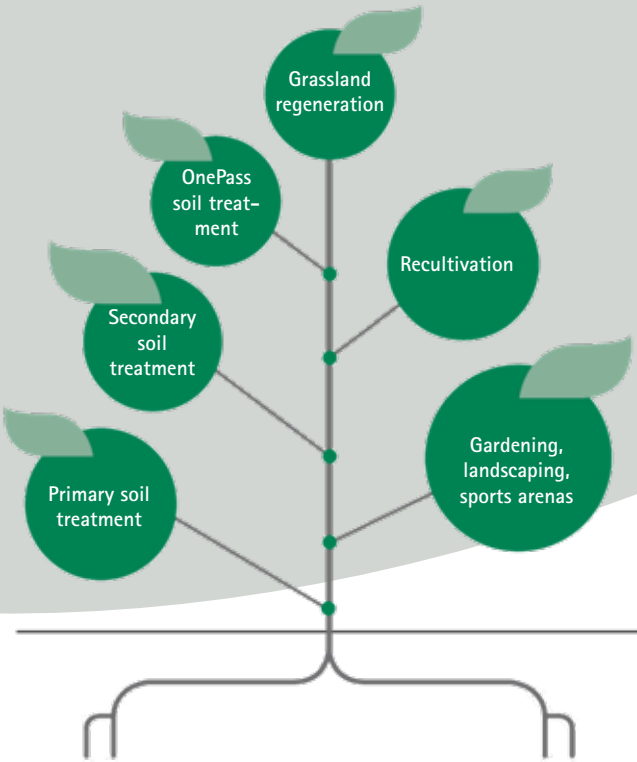

With the DUTZI® System, you not only improve your soils on a sustainable level, year by year, you also generate drastic efficiency gains!

The DUTZI subsoiler FL with its newly designed tines, in conjunction with the free-moving disc coulters, breaks the soil in the area of the compaction horizon up to 70 cm (2.3 ft.) deep, without mixing or turning the soil layers upside down.

The way the loosening tines break the soil leads to an increased pore volume, which results in an increase of the effective field moisture capacity and the water absorptive capacity, in an increased root penetration and, thereby, in a higher level of biological activities of the soil.

In combination with the DUTZI® KR, you benefit from a OnePass soil-treatment system.



FL meets KR

Model		FL 2500	FL 3000	FL 4000
Working with in	mm	2,500	3,000	4,000
Transportation width in	mm	2,320	2,650	3,860
No. of tines		5	5	7
Working depth (max.)	mm	700	700	700
Tine spacing in	mm	530	610	610
No. of disc coulters		5 (+ 2 opt.)	5 (+ 2 opt.)	7 (+ 2 opt.)
Three-point linkage	CAT	II + III	III	III
Min. tractor power (dep. on soil)	kw/HP	100/135	110/150	145/200
Weight in	kg	950	1,050	1,350